

Rebuilding and Clearing Maps

The Rebuild Maps tools refresh maps in the FieldView™ Cab app and are commonly used after changes are made on the web, such as spatial reprocessing or using the Fix Data tool. Understanding which option to use (and when) helps ensure your data displays correctly and prevents unintended data loss.

Read Before Proceeding

Do NOT clear and rebuild maps if your data has not fully synced to the web.

Clearing and rebuilding removes local data from the iPad® and reloads data from the FieldView™ cloud. If data has not finished syncing, that data may be permanently lost.

Rebuild Maps

What Rebuild Maps Does

- Refreshes maps using data currently stored on the iPad®
- Applies edits made on the FieldView.com
- Does not remove local data from the device

When to Use Rebuild Maps

- Maps look outdated or incomplete
- Data was reprocessed on the web
- You were instructed to rebuild after using the Fix Data tool

How Data Syncing Affects Rebuild Maps

When data is live-streamed from a FieldView™ Drive or Precision Planting 20|20® monitor, the Cab app initially displays a visual snapshot of the map. The raw data takes longer to fully sync to the iPad® device.

If syncing is interrupted:


- Only the snapshot may exist locally
- Rebuilding maps will display **only data that has fully synced**

How to Rebuild Maps

1. Open the FieldView™ Cab app
2. Go to **Settings** > select **Data**
3. Choose the season you want to rebuild (for example, 2025)
4. Select **Rebuild Map** next to the desired field(s)

Optional

- Select **Rebuild All Maps** to rebuild all fields for the selected season (Maps rebuild one field at a time.)

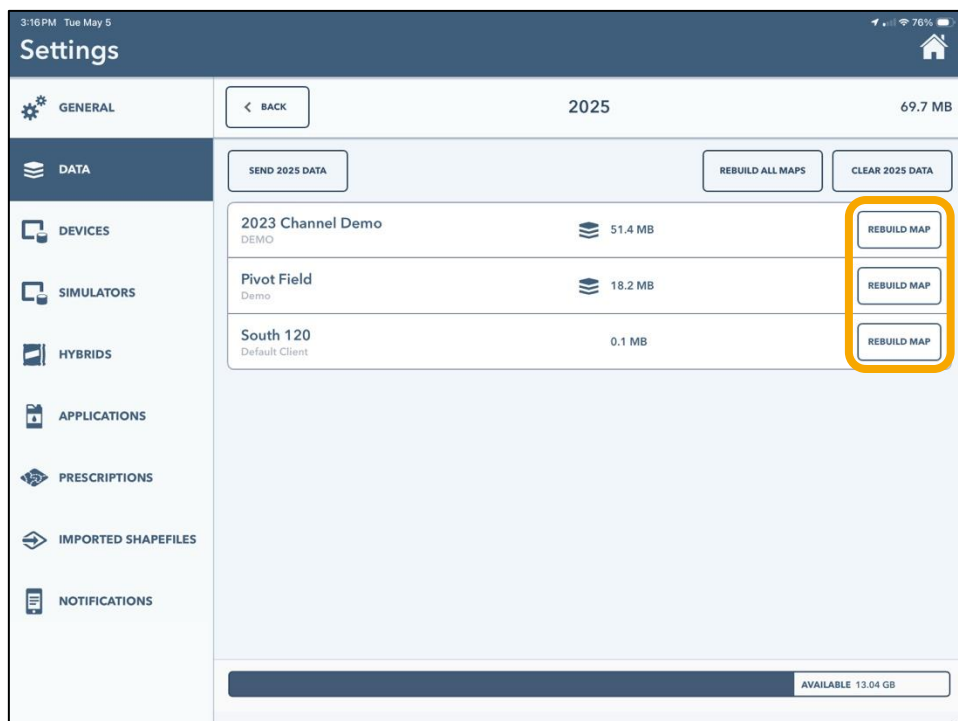

Clear and Rebuild Maps

What Clear and Rebuild Does

- Deletes all locally stored data on the iPad® device
- Re-downloads data from the FieldView™ cloud

Warning

Clearing and rebuilding maps will delete any data that has not fully synced to the web.
Only use this option after confirming all data has fully synced.


When to Use Clear and Rebuild Maps

Clear and rebuild maps only if:

- Data is fully synced to the web
- Maps continue to display incorrectly
- You are instructed to do so by FieldView Support

How to Clear and Rebuild Maps

1. Open the FieldView™ Cab app
2. Go to **Settings** > select **Data**
3. Choose the season you want to clear and rebuild (for example, 2025)
4. Press and hold **Rebuild Map** next to the desired field(s)
 - A "Clearing Map" message will appear
 - To clear all data at once, select **Clear 2025 Data**

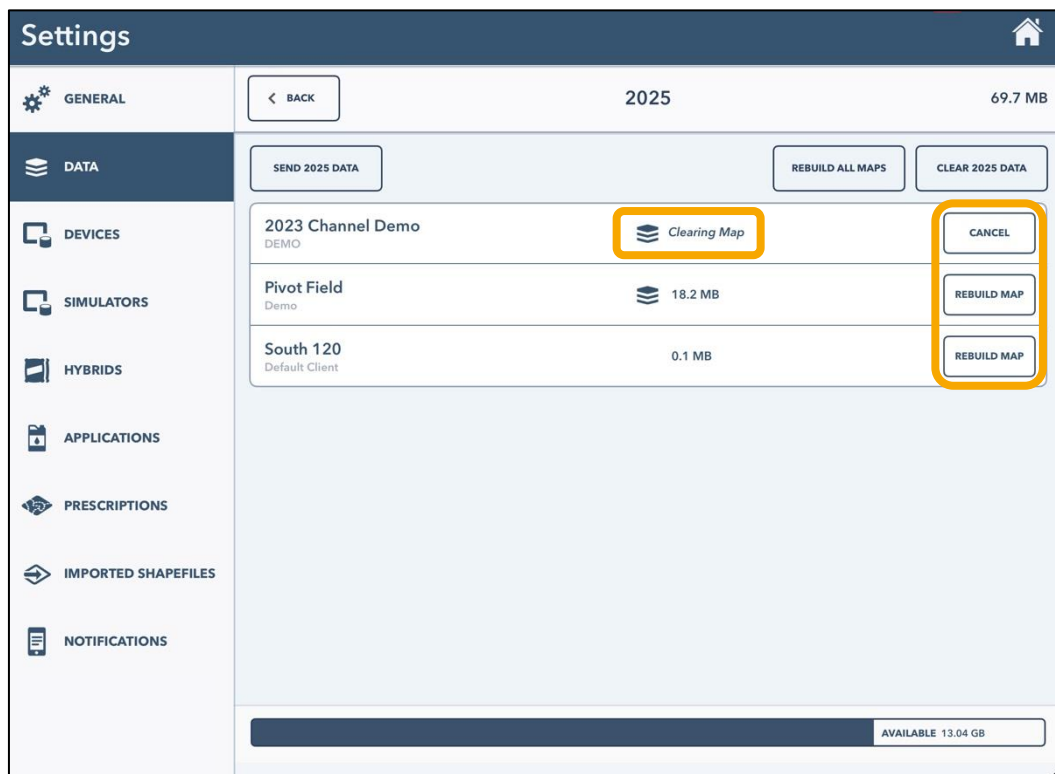

Optional

- Select **Rebuild All Maps** to rebuild all fields for that season

Choosing the Right Option

Action	Recommended When	Risk Level
Rebuild Maps	Refreshing maps after web edits	Low
Clear and Rebuild Maps	Fully synced data but persistent display issues	Higher

Best Practices

- Confirm syncing is complete before rebuilding or clearing
- Use Rebuild Maps first whenever possible
- Reserve Clear and Rebuild Maps for advanced troubleshooting

For questions, please contact FieldView Support at 1.888.924.7475 or support@climate.com.

Services and products offered by Climate LLC are subject to the customer agreeing to our Terms of Service. Our services provide estimates or recommendations based on models. These do not guarantee results. Consult with your agronomist, commodity broker, or other industry professional before making financial, farming, or risk management decisions. More information at <https://www.climate.com/legal/disclaimer/>. FieldView™ is a trademark of Climate LLC. ©2026 Bayer Group. All rights reserved.